


Excellent durable water repellency

DANTOTSU HASSUI™

Compared with our conventional materials, this material features obtuse contact angles with water droplets, meaning they roll easily on the material surface. This creates outstanding water repellency.

The water repellent property is maintained even after 100 washes.

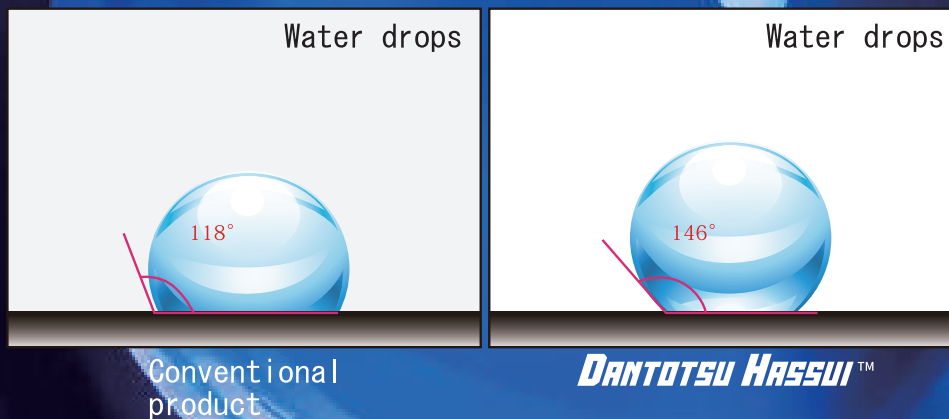

| Basic Performance | | Testing Method | Specification |
|-------------------|------------------|--|--|
| Functionality | Water repellency | JIS L1092 Spray method (applied mutatis mutandis) (KMS-1-59) | Initial condition ≥ Class 4.5 100HL ≥ Class 3 |
| | | JIS L1092A Bundesmann method (KMS-1-60) | Initial condition ≥ Class 4 |
| | | KMS-1-10 ART Fabric abrasion method | Initial condition ≥ Class 4 20HL ≥ Class 3 |
| | Oil repellent | AATCC 118 | Initial condition ≥ Class 3 |

KOMATSU MATERE Co., Ltd.

Head Office - Nu 167, Hama-machi, Nomi-city, Ishikawa, Japan TEL:+81-761-55-1111

Tokyo Sales Branch - 3-10-6 Maruito Ginza No.3 Building 4th floor, Ginza, Chuo-ward, Tokyo, Japan TEL:+81-3-3549-3880

Osaka Sales Branch - 2-2-22 HERBIS ENT Office Tower 8th floor, Umeda, Kita-ward Osaka-city, Osaka, Japan TEL:+81-6-6344-4161


出色的泼水性能 超耐久泼水面料

DANTOTSU HASSUI™

绝对第一！出色的不沾水性

与我公司传统产品相比，布料与水珠接触角为钝角，接触面积小，水珠易于滚动。由此可知这种布料隔断水珠的性能十分优越。

按家庭洗涤方式重复洗涤 100 次后，仍然保持不沾水性能。

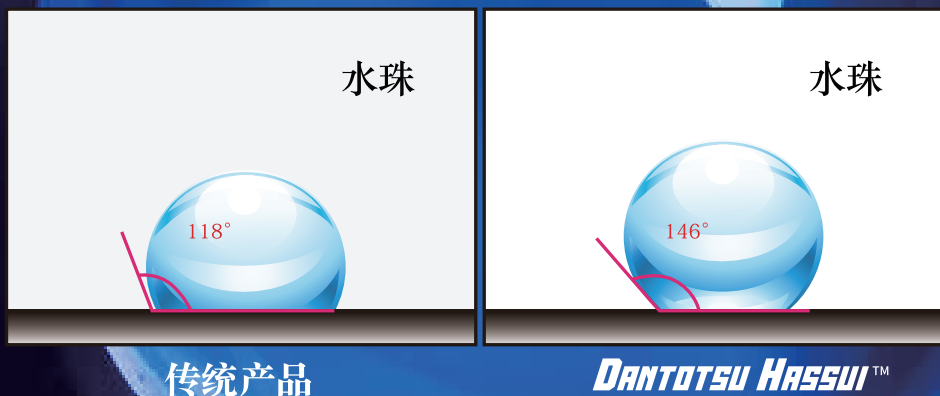

| 基本性能 | | 测试方法 | 标准值 |
|------|------|------------------------------------|--------------------------|
| 功能性 | 不沾水度 | 适用 JIS L1092 喷雾法 (KMS-1-59) | 初始值 ≥ 4.5级 100HL ≥ 3级 |
| | | JIS L1092A Bundesmann 法 (KMS-1-60) | 初始值 ≥ 4级 |
| | | KMS-1-10 ART 湿式磨损法 | 初始值 ≥ 4级 20HL ≥ 3级 |
| | 不沾油度 | AATCC 118 | 初始值 ≥ 3级 |

KOMATSU MATERE Co., Ltd.

总公司 - 石川县能美市浜町NU167番地 TEL: +81-761-55-1111

东京营业所 - 东京都中央区银座3丁目10番6号MARUITO 银座3号大厦 4楼 TEL: +81-3-3549-3880

大阪营业所 - 大阪府大阪市北区梅田2丁目2番22号HERBIS ENT 办公楼8楼 TEL: +81-6-6344-4161

上海代表处 - 中华人民共和国上海市延安西路2201号 上海国际贸易中心 1913室 TEL: +86-21-6275-4558